


# Non-Programmable Thermostat T4700

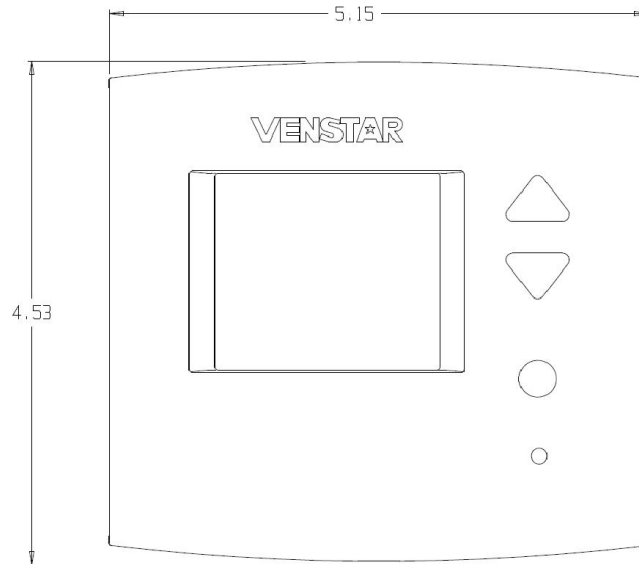

**STANDARD FEATURES:**

- Non-programmable
- On board dry contact equipped to force stat into occupied operation
- Up to 2-stages of heat, 2-stage cool for use with gas/electric, heat pump and electric HVAC equipment
- Diagnostic testing mode for technicians to exercise all outputs at installation
- Emergency Heat switch when set in heat pump mode
- Auxiliary heat lockout based on outdoor temperature
- LED backlit display and backlit color coded keys
- All programming and setpoints stored in non-volatile memory, and are never lost in power failure
- Service filter, service humidifier, service drain pan and service UV lamp indicators
- Outdoor sensor ready
- 3 security levels with heat and cool setpoint limiting
- Adjustable interstage Deadbands and timers
- Built-in humidification or dehumidification control module
- Free Configurator app to easily set up WiFi and thermostats settings
- Title 24 Compliant with optional plug-in WiFi module (part number ACCVWF1)
- Accepts optional outdoor remote temperature sensor (part number ACCTSEN)
- Accepts optional lock ring (part number ACC0625)
- Accepts optional wall plate (part number ACC0425)
- Scrolling display with optional FDD Alert input
- 1-year limited warranty

MODEL:	T4700	QUANTITY:		DATE:	
JOB NAME:					
LOCATION:					
BUYER:				BUYER P.O.#:	
ENGINEER:					