




## Wi-Fi Temperature Sensors

### Ultra-low power Wi-Fi

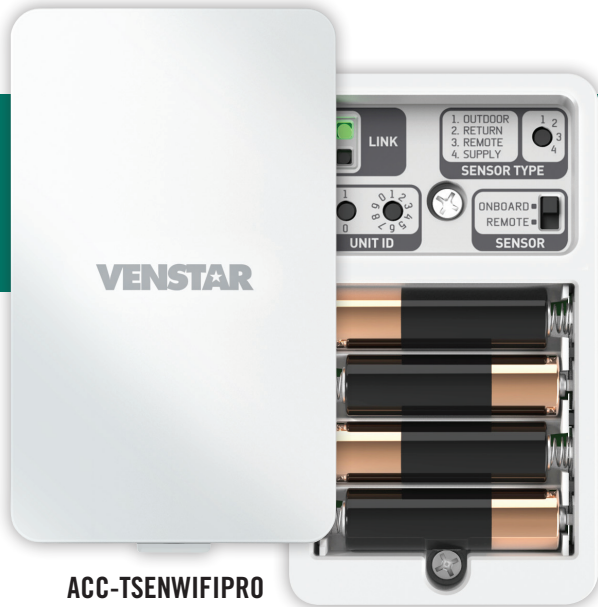

**ACC-TSENWIFIPRO**  
5.2"H x 3.1"W x 1.4"D

- Multiple uses:
  - Remote temperature sensor
  - Outdoor temperature sensor\*\*
  - Indoor room temperature averaging
  - Supply Air temperature sensor
  - Return Air temperature sensor
  - Walk-in refrigeration (mid temp or low temp) monitoring
- Selectable internal or external temperature sensor
- **Stainless 'external' duct sensor included**
- Compatible with most Venstar Wi-Fi thermostats\*
- Easy setup using the Venstar Configurator App
- Automatic temperature averaging when multiple sensors are used
- Up to 20 sensors per subnet
- Operating temperature range: 0° – 120° F w/alkaline batteries, -20° – 130° F w/lithium batteries
- Dual power supply, (4) AA batteries (included) or 24vac
- Expected battery life: Indoor sample rate of 1 per minute: Greater than 2 years (Assumes strong constant Wi-Fi signal strength and connection).

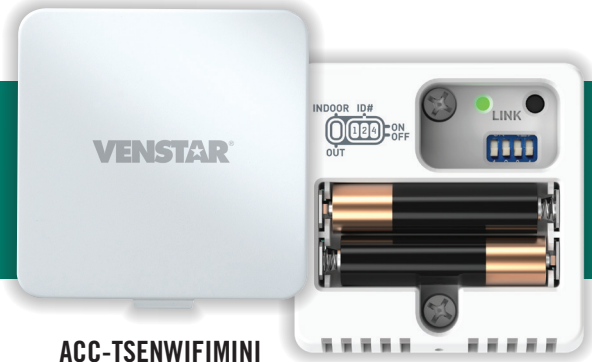

**ACC-TSENWIFIMINI**  
2.5"H x 2.5"W x 1.0"D

- Multiple uses:
  - Remote temperature sensor
  - Outdoor temperature sensor\*\*
- Compatible with most Venstar Wi-Fi thermostats\*
- Easy setup using the Venstar Configurator App
- Automatic temperature averaging when multiple sensors are used
- Up to 8 sensors per subnet
- Operating temperature range: 0° – 120° F w/alkaline batteries; -20° – 130° F w/lithium batteries
- Small Size
- Uses (2) AAA batteries (included)
- Expected battery life: Indoor sample rate of 1 per minute: 1 year (Assumes strong constant Wi-Fi signal strength and connection).

### Compatible with Venstar Wi-Fi thermostats including ColorTouch, Explorer and Explorer Mini



**ColorTouch**



**EXPLORER**



**EXPLORER Mini**

\*Not compatible with T5800, T5900, T6800 & T6900

\*\*Not to be mounted in areas receiving direct rain or snow